



50/60 Hz **R O O F**

RESIDENTIAL/TERTIARY/INDUSTRIAL > R O O F

www.casals.com



> R O O F F A N S <




The range of Casals roof fans covers multiple applications: residential, commercial or tertiary and industrial.

Available in 50Hz and 60Hz, ATEX version, fire applications, constructions in aluminum or polyamide, centrifugal and axial impellers.




HTE/HMTE AXIAL WITH FIBERGLASS COWL


HTE

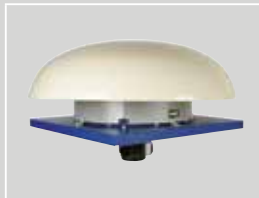

KIT-TE

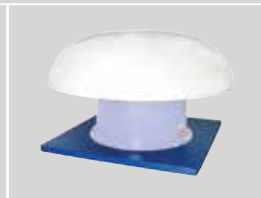


KIT-TM

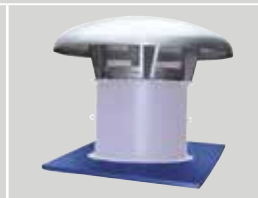

Max. Q 50Hz 9.210 m³/h
Max. Q 60Hz 5.410 CFM



KIT-TE / KIT-TM ROOF KIT FOR CASED FANS

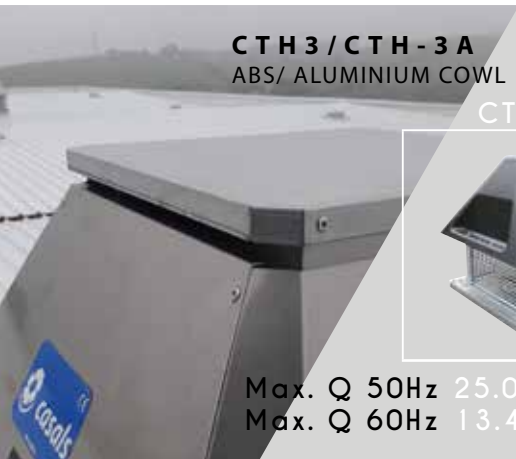


CTH3/CTH-3A ABS/ ALUMINIUM COWL

CTH3



CTH3A

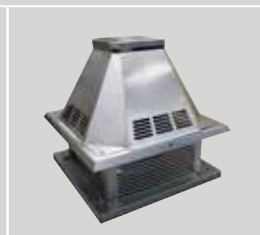

CTH4



CTH4A



Max. Q 50Hz 25.000 m³/h
Max. Q 60Hz 13.400 CFM

40.600 m³/h
28.000 CFM

25.000 m³/h
13.400 CFM

25.000 m³/h
13.400 CFM



CTH4 / CTH-4A VERTICAL DISCHARGE, MADE OF STEEL OR ALUMINIUM



BT ROOF 2 SB CENTRIFUGAL ROOF FAN WITH BACKWARD IMPELLER. HORIZONTAL DISCHARGE. WITH SQUARED OR PLATE BASE



Max. Q 50Hz 1.900 m³/h
Max. Q 60Hz 1.350 CFM

110V /230V

FOCCETA CENTRIFUGAL ROOF FAN FOR FIREPLACES AND BARBECUES



Max. Q 50Hz 750 m³/h
Max. Q 60Hz 530 CFM

