

Focceta

ROOF FANS



FOCCETA

• • •

- Fan for chimney and barbecue extraction.
- Designed to operate continuously at high temperatures (around 200°C).
- Weatherproof structure with anti-corrosion treatment.
- Compact and attractive design.
- Ideal as a draught booster.


MANUFACTURING FEATURES

- Steel motor cover with hammered texture. Polyester powder coated in black colour.
- Backward curved impeller with self-cleaning aluminium blades, dynamically balanced (UNI ISO 1940, Point 1 – Class 6.3).
- Protection grid with anti-bird rings (in accordance with UNI ISO 13857 standard), made of electrically welded steel and black epoxy finishing coat.
- Base made of embossed steel, covered with epoxy to guarantee great resistance to long-term atmospheric agents.
- Aerodynamic shape for optimum performance, in one piece to optimize the air flow.
- Sub-frame for fixing the unit to the chimney.
- Equipped with steel safety wire for anchoring the appliance once installed.
- Class I and IPX4 asynchronous motor, with standard voltage 230V 50/60Hz, with thermal protector and ball bearings.

APPLICATIONS

- Specially designed for smoke extraction use at a continuous operating temperature up to 200 °C in fireplaces and barbecues.


DIMENSIONS

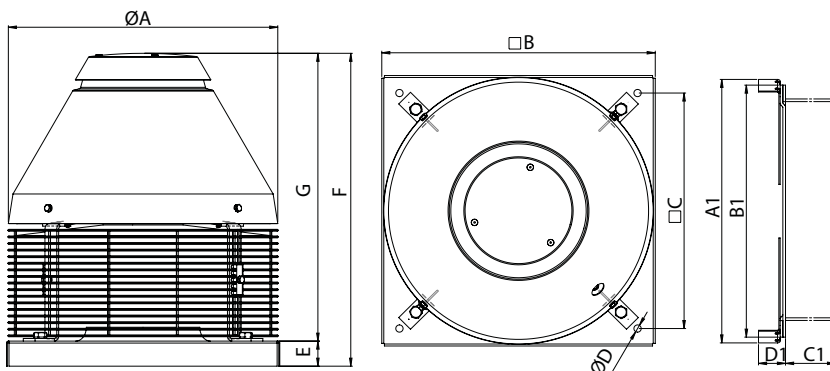

A1	B	B1	C	C1	D1	E	F	G	ØA	ØD	Øinlet
401	410	357	357	140	40	38	518	480	405	10	170



“ The king of heat:
up to 200°C
non-stop ”

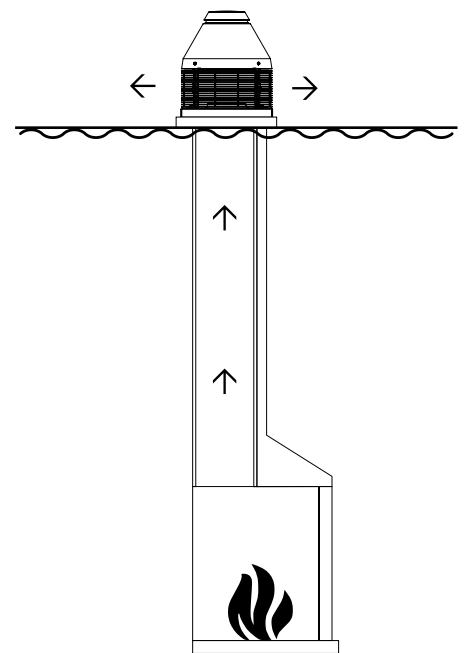

° Example of installation